


REXX-E 26 | ELECTRIC SELF-PROPELLED MACHINE - with large platform



silver[®]
bull
produced by
LOCHMANN 
alpine trailers

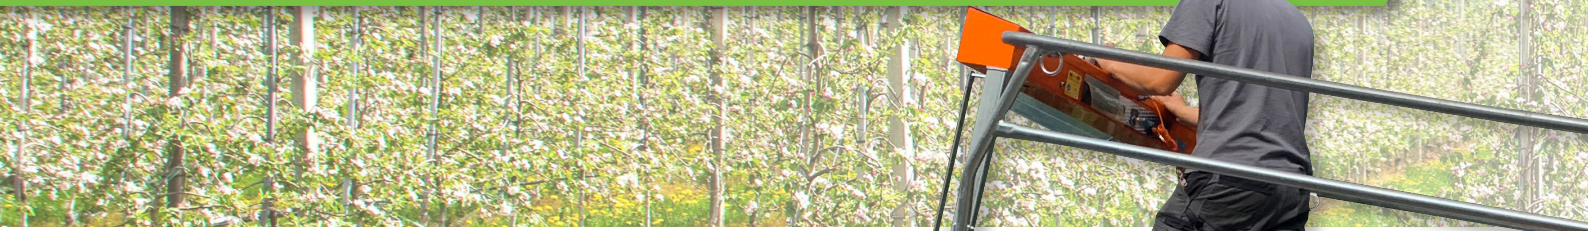

BASIC MODEL

Speed 5,0 km/h

Two-wheel drive

Tyres 26x12.00-12 PR8

Front wheel steering with 40° impact

Automatic differential lock on the rear axle

Hydraulic lifting system at 2.70 m working height

Side, automatic slope compensation – 15%

3-phase AC motor, 24 V / 3 kW, with encoder (for constant speed control) and integrated temperature sensor

Batteries 390 Ah – 24 V

Integrated electronic charger

Electricity recovery during downhill journeys

Monitored speed control for ascents and descents

Active pendulum lock on the front axle

Electrically infinitely adjustable drawers on the work platform

Acoustic warning signal at start-up and when switching to automatic mode

Acoustic warning on excessively steep terrain

Automatic safety tilt lock in negative direction (slope)

Swivelling work guardrails

Driving functions in automatic mode

Security programmes

Negative braking system and second safety brake on the rear axle

OPTIONAL

Front loader – rear loader – roller conveyor

Hydraulically swivelling forklift forks

Automatic tilt compensation in the direction of travel – 20%

Automatic steering system

Four-wheel drive

Rear additional control draws and emergency stop, start-stop switch and rear forklift

Four-wheel steering and separate steering

Drawbar incl. road approval (incl. hydraulic support foot)

The car radio with USB connection.

Storage for windfall fruit with 3 boxes

Drawer extension

Twin tyres on the rear axle

Additional platform on rear forklift

Lithium batteries





REXX-E 26



TECHNICAL DATA	
CHASSIS	REXX-E 26
Length of lifting platform without front and rear stackers	2.800 mm
Length of lifting platform with forklift folded down	3.900 mm
Width	1.330 mm
Total height retracted	2.300 mm
Wheelbase	2.100 mm
Inside turning radius, front steering	2.900 mm
Inside turning radius with four-wheel steering	1.400 mm
Ground clearance	200 mm
Steering system	wheel steering
Lifting gear	cross
Drive	Three-phase motor 24 V 3 kW
Battery	24 V – 390 Ah lead battery
Weight lifting platform	2.200 kg
LIFTING PLATFORM	
Length	2.600 mm
Width	1.300 mm
Maximum width	2.400 mm
Working height retracted	1.050 mm
Working height extended	2.700 mm